

K4GFBP10VVR

GAS LOW-BUILT GRIDDLE PLATE 1 MODULE 1/2 SMOOTH 1/2 GROOVED PLATE +
OPEN CABINET - PERFORMANCE LINE



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Quick temperature rise and heat retention achieved by **2-branch burners with optimized combustion**, suitable for working at high temperatures, with thermostatically controlled 8-position thermocouple safety valve and pilot flame. Temperature regulation **between 150°C and 315°C**. Safety ensured by a thermocouple kept active by the pilot burner flame.

Large-size low-built cooking plate made of special stainless steel that allows excellent heat transmission and **mirror polished finishing** to ensure non-stick food and quick cleaning in compliance with current regulations.

Two completely separate cooking plates to allow for two different cooking processes at different temperatures. **1/2 smooth 1/2 grooved cooking plate**.

Sloping worktop facing the fat drain hole. **Large hole on the cooking surface** for draining fats into a **provided container with a capacity of 1.3 liters** below the cooking surface itself.

Moulded AISI 304 stainless steel worktop with rounded edges for easy cleaning. Stainless steel front, side and back panels.

A Teflon plug, suitable to plug the drain in case of any cooking with a film of oil, available **on demand**.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Height-adjustable stainless steel legs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 900 mm
Height: 850 mm
Weight: 104 kg
Volume: 0.99 m³
Gas power: 18.00 kW




K4GFBP10VVR

GAS GRIDDLE PLATE ½ SMOOTH ½ GROOVED TABLE + OPEN CABINET - FRY TOP A GAS ½ LISCIO ½ RIGATO SU VANO APERTO - GRILLADE À GAZ ½ LISSE ½ NERVUREE + BAIE LIBRE OUVERTE - GASGRIDDLEPLATTE ½ GLATT ½ GERILLT + UNTERSCHRANK OFFEN - FRY TOP A GAS PLANCHA ½ LISA ½ RIZADA + BASE ABIERTA - ГАЗОВАЯ ЖАРОЧНАЯ ПОВЕРХНОСТЬ, ½ ГЛАДКАЯ ½ РИФЛЁНАЯ + ОТКРЫТЫЙ ШКАФ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	800x900x250
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	16
Tipo / Type / Type / Typ / Тип (A)		A1/B21
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	1,262
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	1,694
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	16
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Piastra ½ liscia ½ rigata / Plaque ½ lisse ½ nervurée / ½ Smooth ½ Grooved plate / ½ Glatte ½ Gerillte Platte/ Plancha ½ lisa ½ rizada / ½ гладкая + ½ рифлёная конфорка		X

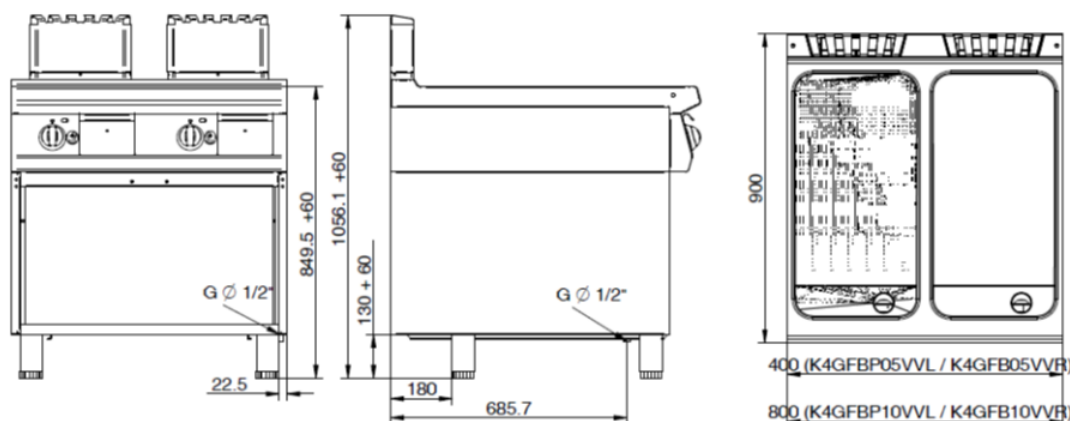

G= Gas\Gaz \ Газ

