

# K4GFLS10VV

GAS GRIDDLE PLATE SMOOTH + OPEN CABINET - SOLUTION LINE



## PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Quick temperature rise and heat retention obtained through **high efficiency stabilized-flamed U-shaped burners**, suitable for working at high temperatures. U-shaped single-branch burners with optimised combustion, maximum tap, minimum safety thermocouple and pilot flame. Equipped with a safety gas cock that allows the flame to be regulated **from maximum to minimum** and enables the griddle plate to exceed 300°C. Thermal stability of the cooking plate achieved at maximum power at 350°C. Safety ensured by a thermocouple kept active by the burner flame.

**Single large plate** that allows excellent heat transmission in terms of heating.

**Two independent cooking zones**, each equipped with temperature adjustment controls. **Smooth cooking plate.**

Sloping worktop facing the fat drain hole. **Large hole on the cooking surface** for draining fats into a **provided container with a capacity of 2.9 liters** below the cooking surface itself.

A Teflon plug, suitable to plug the drain in case of any cooking with a film of oil, available **on demand**.

Thick AISI 304 cooking surface with rounded edges and **welded splash guard** for easy cleaning. Stainless steel front, side and back panels.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

**Height-adjustable** stainless steel legs.

Accessories available **on demand**.



## TECHNICAL SPECIFICATIONS

**Width:** 800 mm  
**Depth:** 900 mm  
**Height:** 850 mm  
**Weight:** 108 kg  
**Volume:** 0.90 m<sup>3</sup>  
**Gas power:** 12.00 kW




# K4GFLS10VV

GAS GRIDDLE PLATE SMOOTH TABLE + OPEN CABINET - FRY TOP A GAS LISCIO SU VANO APERTO - GRILLADE À GAZ LISSE + BAIE LIBRE OUVERTE - GASGRIDDLEPLATTE GLATT + UNTERSCHRANK OFFEN - FRY TOP A GAS PLANCHÀ LISA + BASE ABIERTA - ГАЗОВАЯ ЖАРОЧНАЯ ПОВЕРХНОСТЬ, ГЛАДКАЯ + ОТКРЫТЫЙ ШКАФ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

| Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры                                  | [мм]          | 800x900x850     |
|--------------------------------------------------------------------------------------------------|---------------|-----------------|
| Gas / Gaz / Gas / Gas / Газ<br>(B)                                                               | [Kw] - [кВт]  | 12              |
| Tipo / Type / Type / Typ / Тип<br>(A)                                                            |               | A1              |
| GPL/LPG / Сжиженный нефтяной газ<br>(G30)<br>(D)                                                 | [Kg/h] [кг/ч] | 0,946           |
| Metano / Methane / Natural gas / Erdgas / Метан<br>(G20)<br>(C)                                  | [m3/h] [м3/ч] | 1,270           |
| Aria / Air / Luft / Aire / Воздух                                                                | [m3/h] [м3/ч] | 24              |
| Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas /<br>Газовое соединение         |               | UNI-ISO 7/1 R ½ |
| Piastra liscia / Plaque lisse / Smooth plate / Glatte Platte/ Plancha lisa /<br>гладкая конфорка |               | X               |

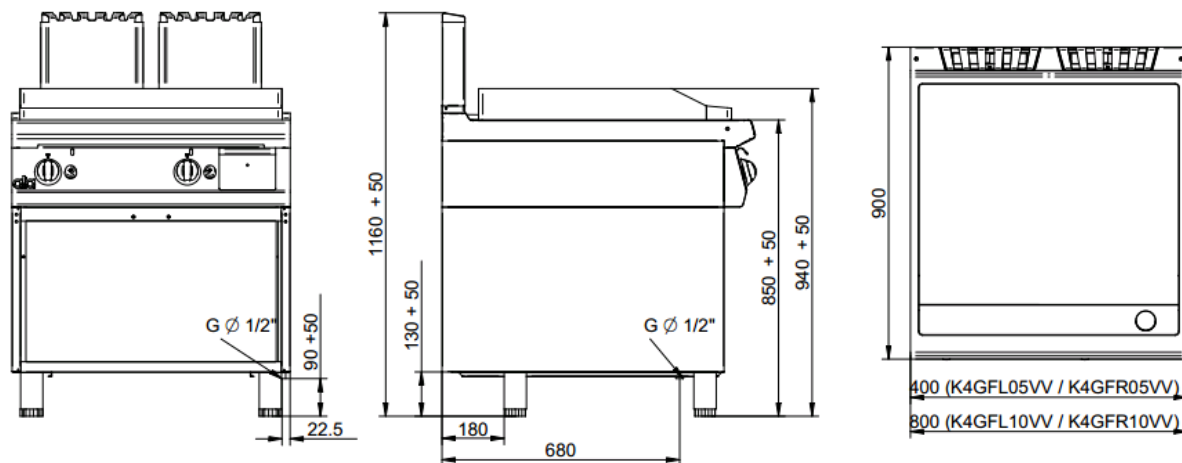

G= Gas\Gaz \ Гз