

K4GFRS10TT

GAS GRIDDLE PLATE 1/2 SMOOTH 1/2 GROOVED TOP - SOLUTION LINE



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Quick temperature rise and heat retention obtained through **high efficiency stabilized-flamed U-shaped burners**, suitable for working at high temperatures. U-shaped single-branch burners with optimised combustion, maximum tap, minimum safety thermocouple and pilot flame. Equipped with a safety gas cock that allows the flame to be regulated **from maximum to minimum** and enables the griddle plate to exceed 300°C. Thermal stability of the cooking plate achieved at maximum power at 350°C. Safety ensured by a thermocouple kept active by the burner flame.

Single large plate that allows excellent heat transmission in terms of heating.

Two independent cooking zones, each equipped with temperature adjustment controls. **1/2 smooth 1/2 grooved cooking plate**.

Sloping worktop facing the fat drain hole. **Large hole on the cooking surface** for draining fats into a **provided container with a capacity of 2.9 liters** below the cooking surface itself.

A Teflon plug, suitable to plug the drain in case of any cooking with a film of oil, available **on demand**.

Thick AISI 304 cooking surface with rounded edges and **welded splash guard** for easy cleaning. Stainless steel front, side and back panels.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 900 mm
Height: 265 mm
Weight: 89 kg
Volume: 0.47 m³
Gas power: 12.00 kW




K4GFRS10TT

GAS GRIDDLE PLATE ½ SMOOTH ½ GROOVED TABLE TOP - FRY TOP A GAS ½ LISCIO ½ RIGATO DA BANCO - GRILLADE À GAZ ½ LISSE ½ NERVUREE À POSER - GASGRIDDLEPLATTE ½ GLATT ½ GERILLT TISCHGERÄT - FRY TOP A GAS PLANCHA ½ LISA ½ RIZADA DE BANCO - ГАЗОВАЯ ЖАРОЧНАЯ ПОВЕРХНОСТЬ, ½ ГЛАДКАЯ ½ РИФЛЁНАЯ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	800x900x250
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	12
Tipo / Type / Type / Typ / Тип (A)		A1
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	0,946
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	1,270
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	24
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Piastra ½ liscia ½ rigata / Plaque ½ lisse ½ nervurée / ½ Smooth ½ Grooved plate / ½ Glatte ½ Gerillte Platte/ Plancha ½ lisa ½ rizada / ½ гладкая + ½ рифлёная конфорка		X

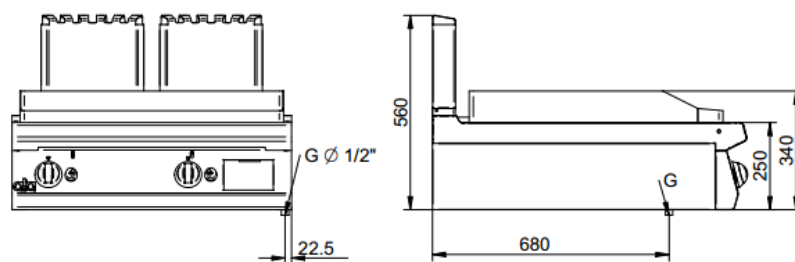

G= Gas\Gaz \ Газ

