

K6GFR10TT

GAS GRIDDLE PLATE 1/2 SMOOTH 1/2 GROOVED TOP



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs.

Quick temperature rise and heat retention obtained through two stabilized flame burners at high performance, suitable to work at high temperatures. Ignition by electric spark at 230V 1 phase + neutral.

Thick, round-cornered cooking surface with welded splash guard for easy cleaning. Cooking plate gently sloping towards the fat drain, which is connected to a container under the work top. **Standard equipped with a fat drain container.**

1/2 smooth 1/2 grooved cooking plate.

Provided with a safety thermostatic gas cock, which enables the output to be regulated up to 300°C. Safety ensured by a thermocouple kept active by the burner flame.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 600 mm

Depth: 600 mm

Height: 295 mm

Weight: 39 kg

Volume: 0.31 m³

Electrical power: 0.10 kW

Gas power: 8.00 kW




VEGGIEWOOD Tomato, lettuce, onion, mayo 5€	TERIYAKI CLUB Teriyaki chicken, tomato, lettuce, red onion 5,5€
CLUB SANDWICH Chicken, bacon, tomato, lettuce, onion, mayo 5,5€	HOLLY SANDWICH Chicken, confit onion, egg, lettuce 5,5€
MADRAS CLUB Curry chicken, tomato, lettuce, red onion 6€	MON BIKINI Ham, cheese 5€
HOLLY STARTERS	HOLLY DESSERTS
CONVENT CHICKEN WINGS 4,5€	CHOCOLATE TRINITY Three textures of chocolate 4€
ONION RINGS OF FIRE 4€	HOLLY CHEESECAKE From New York to Heaven 4€
CAESAR'S SALAD 6,5€	HOLLY ICE CREAMS Cool your passions 5,5€
TRINITY CHEESE SALAD 6,5€	
DRIVING FRENCH FRIES 5€	
 FOLLOW US ON facebook	ENGLISH T 049 342 37 59

K6GFR10TT

GAS GRIDDLE PLATE GROOVED TABLE TOP - FRY TOP A GAS RIGATO DA BANCO -
GRILLADE À GAZ NERVUREE À POSER - GASGRIDDLEPLATTE GERILLT TISCHGERÄT
- FRY TOP A GAS PLANCHA RIZADA DE BANCO - ГАЗОВАЯ ЖАРОЧНАЯ ПОВЕРХНОСТЬ,
½ ГЛАДКАЯ ½ РИФЛЁНАЯ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS /
TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	600x600x280
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	8
Tipo / Type / Type / Typ / Тип (A)		A1
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	0,630
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	0,746
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	16
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Piastra ½ liscia ½ rigata / Plaque ½ lisse ½ nervurée / ½ Smooth ½ Grooved plate / ½ Glatte ½ Gerillte Platte/ Plancha ½ lisa ½ rizada / ½ гладкая + ½ рифлёная конфорка		X

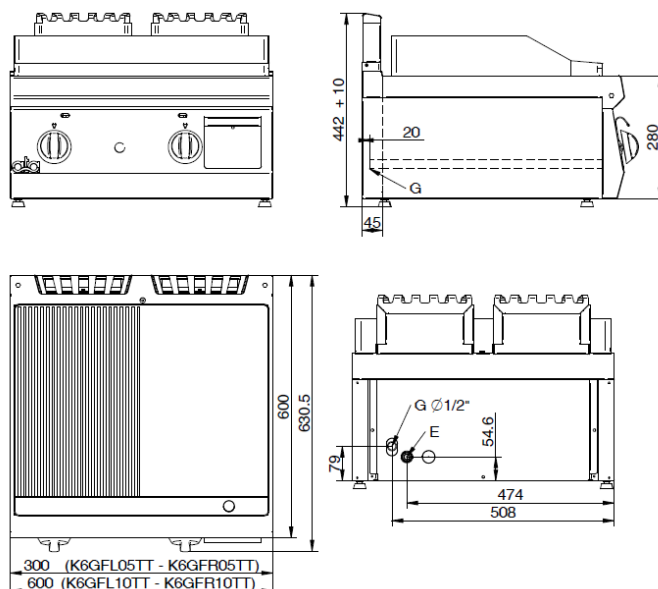

E= elettrico \ électrique \ electric\ Elektrisch \ eléctrico \
электрич

G= Gas\Gaz \ Газ