

K7ECI05TT

TOP INDUCTION RANGE 2 PLATES



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

6 mm-thick pyroceram work top. **27 x 27 cm square radiating areas** that are placed under glass and work thanks to a potentiometer with 9 power levels. Continuous power control. Provided with a **display placed under glass**, so you can check the set power level and see error messages (if any). Safety ensured by a sensor against overtemperature in case of functioning with empty pots. Pot detection sensor. Detection sensor of pots with a smaller diameter than 12 cm.

AISI 304 work surface with rounded corners for easy cleaning. Stainless steel AISI 304 front panel.

Possibility to work with **any kind of pots suitable for induction**: made of iron, cast iron or other ferromagnetic material. Constant energy efficiency, even if utensils of different shapes are used.

Remarkable time and power savings because of **halved cooking time and energy consumption** against traditional cooking systems.

Better work environment because of **lower heat losses**.

Increased users' safety: only pots become hot while cooktop remains cold, so that the possibility to get burned is strongly reduced.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 400 mm
Depth: 700 mm
Height: 265 mm
Weight: 23 kg
Volume: 0.21 m³
Electrical power: 10.00 kW





K7ECI05TT

CUCINA INDUZIONE TOP 2 PIASTRE / CUISINIÈRE À INDUCTION 2 PLAQUES / TOP INDUCTION RANGE 2 PLATES / 2-FELDER INDUKTIONSHERD / COCINA INDUCCIÓN 2 FUEGOS / ИНДУКЦИОННАЯ ПЛИТА С 2 КОНФОРКАМИ ВАРОЧНАЯ ПОВЕРХНОСТЬ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	400x700x250
Potenza elettrica / Puissance électrique / Electric Power / Elektro-Leistung / электр. (E)	[Kw] - [кВт]	10
(F)	[V]	400/3N
(G)	[Hz] - [Гц]	50/60
Cavo (non fornito in dotazione) / Cable (non fourni) / Cable (not supplied) / Kabel (nicht mitgeliefert) / Cable / Кабель	H07 RN-F [мм²]	4 x 4
Voltaggi diversi e versioni navali disponibili su richiesta / Différentes tensions et versions maritimes disponibles sur demande / Different voltages and marine versions available on request / Verschiedene Spannungen und Schiffsausführungen auf Anfrage erhältlich / Различные напряжения и варианты исполнения корабля - по запросу		
Piastra induzione/ Plaque induction / Induction Plate / Induktionsplatte / Placa induccion / Индукционные	[Kw] - [кВт]	2 x 5



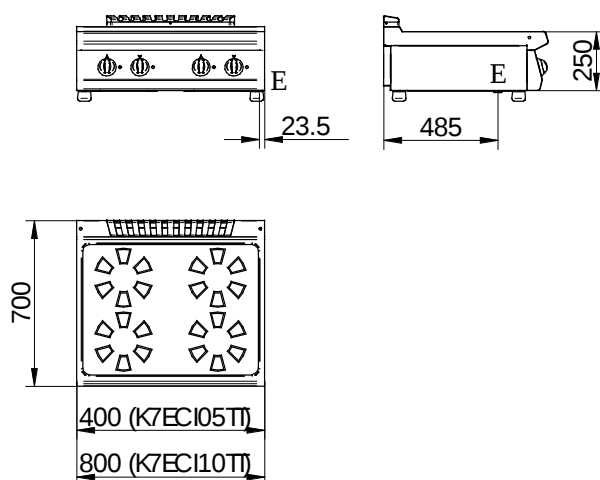

E= elettrico \ électrique \ electric\ Elektrisch \ eléctrico \ электрич