

K7EFB10VVR

ELECTRIC LOW-BUILT GRIDDLE PLATE 1/2 SMOOTH + 1/2 GROOVED + OPEN
CABINET - PERFORMANCE LINE



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Heating obtained through **radiant heating elements** placed under the cooking plate. Thermostat to adjust the temperature of the plate between 120°C and 320°C. Safety thermostat with manual reset.

Single large-size low-built cooking plate made of special stainless steel that allows excellent heat transmission and **mirror polished finishing** to ensure non-stick food and quick cleaning in compliance with current regulations.

Two independent cooking zones, each equipped with temperature adjustment controls.

1/2 smooth 1/2 grooved cooking plate.

Sloping worktop facing the fat drain hole. **Large hole on the cooking surface** for draining fats into **a provided container with a capacity of 2.9 liters** below the cooking surface itself.

Moulded AISI 304 stainless steel worktop with rounded edges for easy cleaning. Stainless steel front, side and back panels.

A Teflon plug, suitable to plug the drain in case of any cooking with a film of oil, **available on demand**.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Height-adjustable stainless steel legs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 700 mm
Height: 850 mm
Weight: 75 kg
Volume: 0.80 m³
Electrical power: 10.00 kW



K7EFB10VVR

FRY TP ELETTRICO PIASTRA RIBASSATA ½ LISCIA ½ RIGATA IN ACCIAIO INOX CON FINITURA A SPECCHIO + VANO APERTO

PLAQUE A SNACKER ELECTRIQUE ½ LISSE ½ NERVUREE SURBAISSEE EN ACIER INOX AVEC FINITION MIROIR + BAIE LIBRE OUVERTE

ELECTRIC GRIDDLE PLATE WITH LOW-BUILT ½ SMOOTH ½ GROOVED PLATE MADE OF STAINLESS STEEL AND POLISH FINISHING + OPEN CABINET


ELEKTROGRIDDLEPLATTE EINGELASSENE ½ GLATTE ½ GERILLTE BRATFLÄCHE AUS EDELSTAHL MIT SPIEGELARTIGER OBERFLÄCHE + UNTERBAU OFFEN

FRY TOP ELECTRICO PLANCHA ½ LISA ½ RIZADA DE PERFIL BAJO EN ACIERO INOXIDABLE CON ACABADO DE ESPEJO + BASE ABIERTA

ЗЛЕКТРИЧЕСКИЕ ЖАРОЧНЫЕ ПОВЕРХНОСТИ ½ РЛАДКАЯ ½ РМФЛЁНАЯ + ОТКРЫТЫ ШКАФ, ЗАРЛЮБЛЁННАЯ НЛМТА МЗ НЕРШАВЕЌМ С НОЛМРОВАННО НОБЕРХНОСЬЮ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	800x700x295
Potenza elettrica / Puissance électrique / Electric Power / Elektro-Leistung / электр. (E)	[Kw] - [кВт]	10
(F)	[V]	400/3N
(G)	[Hz] - [Гц]	50/60
Cavo (non fornito in dotazione) / Cable (non fourni) / Cable (not supplied) / Kabel (nicht mitgeliefert) / Cable / Кабель	H07 RN-F [мм²]	5 x 2,5
Voltaggi diversi e versioni navali disponibili su richiesta / Différentes tensions et versions maritimes disponibles sur demande / Different voltages and marine versions available on request / Verschiedene Spannungen und Schiffsausführungen auf Anfrage erhältlich / Различные напряжения и варианты исполнения корабля - по запросу		
Piastra liscia / Plaque lisse / Smooth plate / Glatte Platte/ Plancha lisa / Гладкая конфорка		X

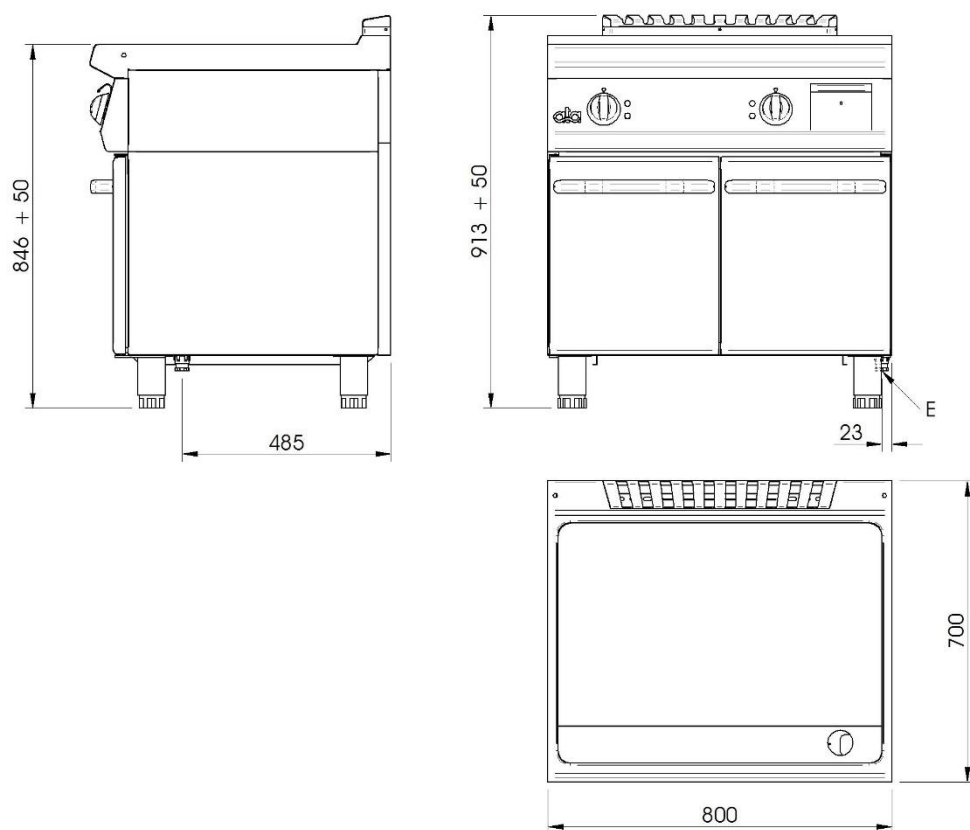

E= elettrico \ électrique \ electric\ Elektrisch \ eléctrico \ электрич

Optional

n. 2 x **K7PORTA** Porta - Porte - Door - Tür - Puerta – Дверца