

K7GFB10TTR

GAS LOW-BUILT GRIDDLE PLATE 1/2 SMOOTH 1/2 GROOVED STEEL TOP -
PERFORMANCE LINE



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Quick temperature rise and heat retention achieved by **2-branch burners with optimized combustion**, suitable for working at high temperatures, with thermostatically controlled 8-position thermocouple safety valve and pilot flame. Temperature regulation **between 150°C and 315°C**. Safety ensured by a thermocouple kept active by the pilot burner flame.

Single large-size low-built cooking plate made of special stainless steel that allows excellent heat transmission and **mirror polished finishing** to ensure non-stick food and quick cleaning in compliance with current regulations.

Two different cooking areas, each provided with its temperature controls. **1/2 smooth 1/2 grooved cooking plate**.

Sloping worktop facing the fat drain hole. **Large hole on the cooking surface** for draining fats into a **provided container with a capacity of 1.3 liters** below the cooking surface itself.

Moulded AISI 304 stainless steel worktop with rounded edges for easy cleaning. Stainless steel front, side and back panels.

A Teflon plug, suitable to plug the drain in case of any cooking with a film of oil, available **on demand**.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 700 mm
Height: 265 mm
Weight: 61 kg
Volume: 0.38 m³
Gas power: 13.80 kW




K7GFB10TTR

GAS GRIDDLE PLATE GROOVED TABLE TOP - FRY TOP A GAS RIGATO DA BANCO -
GRILLADE À GAZ NERVUREE À POSER - GASGRIDDLEPLATTE GERILLT TISCHGERÄT
- FRY TOP A GAS PLANCHA RIZADA DE BANCO - РИФЛЁНАЯ ГАЗОВАЯ ЖАРОЧНАЯ
ПОВЕРХНОСТЬ НАСТОЛЬНАЯ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS /
TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[mm]	700x800x295
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	14
Tipo / Type / Type / Typ / Тип (A)		A1
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	1,104
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	1,481
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	28
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Piastra ½ liscia ½ rigata / Plaque ½ lisse ½ nervurée / ½ Smooth ½ Grooved plate / ½ Glatte ½ Gerillte Platte/ Plancha ½ lisa ½ rizada / ½ гладкая + ½ рифлёная конфорка		X

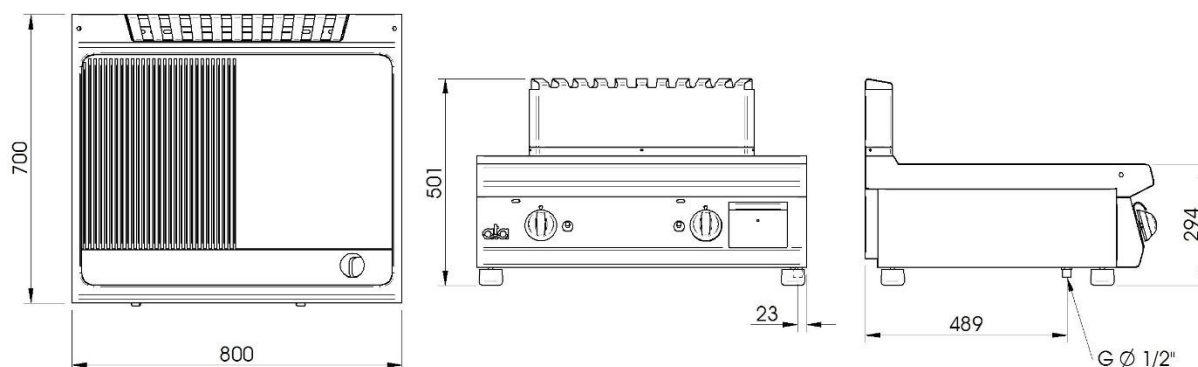

G= Gas\Gaz \ Газ