

K7GFG1015A

GAS FRYER DOUBLE TANK 15+15 LT. CONTROL BOARD ON TOP - PERFORMANCE LINE



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Oil heating achieved through **optimized combustion stainless steel burners** equipped with a heat exchanger in the tank. Powerful and quick intervention of the heating elements to prevent the temperature from dropping when the product is poured into the tank.

Two tanks of 15 liters each, equipped with 8-position mechanical thermostatic valve corresponding to 8 temperature levels **from 120°C to 190°C**. Safety guaranteed by a thermocouple kept active by the pilot burner flame. Additional safety thermostat.

Stainless steel tanks with rounded edges sloping towards the drain hole connected to a stainless steel container to collect the oil. Oil drains from the tank via a tap into an internal collection container with a filter.

Standard provided with two steel baskets coated with a layer of protective material K26281 and two stainless steel basin covers K7COPFGP.

Standard provided with one stainless steel oil container with filter.

Moulded AISI 304 stainless steel worktop for easy cleaning. Front panel in AISI 304 stainless steel. Cold-formed stainless steel tanks.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Height-adjustable stainless steel legs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 800 mm
Depth: 700 mm
Height: 850 mm
Weight: 88 kg
Volume: 0.80 m³
Gas power: 30.00 kW




K7GFG1015A

FRIGGITRICI A GAS // FRITEUSES À GAZ // GAS FRYER // GAS FRITTEUSEN // FREIDORAS A GAS // ГАЗОВЫЕ ФРИТЮРНИЦЫ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	800x700x850
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	30
Tipo / Type / Type / Typ / Тип (A)		A1/B21
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	2,365
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	3,089
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	60
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Capacità vasca/ Capacité cuve/ Tank capacity/ Beckeninhalt/ Capacidad cuba / Ёмкость чаши	[Lt] [л]	15 + 15
per vasca/ par cuve/ each tank/ pro Becken / por cuba / на чашу/	[kg] [кг]	2 + 2
Max / макс	[Kg/h] [кг/ч]	40

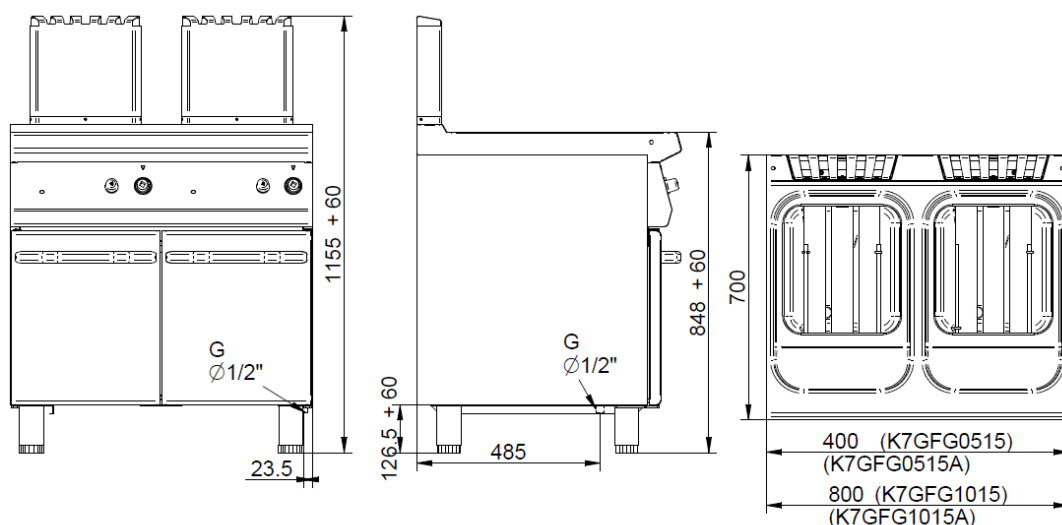

G = Gas / Gaz / Gas / Gas / Газ

Standard

			
		Mm	
	K26281	a 270 b 280 h 111	Cesto friggitrice 1/1 Panier friteuse 1/1 Basket for fryer 1/1 Korb für Fritteuse 1/1 Cesta freidora 1/1 Корзина для фритюрницы 1/1
	C2VOFG		Bacinella raccogli olio + Filtro inox Bac de récupération d'huile + filtre en acier inoxydable Container for collecting oil + stainless steel filter Ölauffangwanne + Edelstahlfilter Recipiente de recogida de aceite + filtro de acero inoxidable Емкость для сбора масла + фильтр нержавеющей сталь
	K7COPFGP		Lid for gas fryer Coperchio per friggitrice a gas Couvercle pour friteuse à gaz Deckel für Gasfritteuse Tapa para freidora a gas Крышка для газовой фритюрницы

Accessori - Accessoires - Accessories - Zubehöre -

Accesorios - Аксессуары

	K26280	a 130 b 280 h →111	Cesto friggitrice 1/2 Panier friteuse 1/2 Basket for fryer 1/2 Korb für Fritteuse 1/2 Cesta freidora 1/2 Корзина для фритюрницы 1/2
	K00088		Kit giunzione serie 700/600 Kit connexion série 700/600 Connecting kit series 700/600 Verbindungssatz Serie 700/600 Kit conexión serie 700/600 Комплект соединяющие части серия 700/600