

# C2GFL10TT

GAS GRIDDLE PLATE SMOOTH TOP - SOLUTION LINE



## PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs.

**Quick temperature rise and heat retention** obtained through **two stabilized flame burners at high performance**, suitable for working at high temperatures. Ignition by electric spark working at 230V 1 phase + neutral.

**Thick, round-cornered cooking surface with welded splash guard** for easy cleaning. Cooking plate gently sloping towards the fat drain, which is connected to a container under the work top. **Standard equipped with a fat drain container.**

**Two different cooking areas**, each provided with its temperature controls. **Smooth cooking plate.**

Provided with a safety thermostatic gas cock, which enables the output to be regulated up to 300°C. Safety ensured by a thermocouple kept active by the burner flame.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Accessories available **on demand**.



## TECHNICAL SPECIFICATIONS

**Width:** 800 mm

**Depth:** 700 mm

**Height:** 265 mm

**Weight:** 54 kg

**Volume:** 0.38 m<sup>3</sup>

**Electrical power:** 0.10 kW

**Gas power:** 10.50 kW




# C2GFL10TT

GAS GRIDDLE PLATE SMOOTH TABLE TOP - FRY TOP A GAS LISCIO DA BANCO -  
GRILLADE À GAZ LISSE À POSER - GASGRIDDLEPLATTE GLATT TISCHGERÄT - FRY  
TOP A GAS PLANCHA LISA DE BANCO - ГЛАДКАЯ ГАЗОВАЯ ЖАРОЧНАЯ ПОВЕРХНОСТЬ  
НАСТОЛЬНАЯ

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS /  
TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

| Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры                                  | [mm]          | 800x700x295     |
|--------------------------------------------------------------------------------------------------|---------------|-----------------|
| Gas / Gaz / Gas / Gas / Газ<br>(B)                                                               | [Kw] - [кВт]  | 11,4            |
| Tipo / Type / Type / Typ / Тип<br>(A)                                                            |               | A1              |
| GPL/LPG / Сжиженный нефтяной газ<br>(G30)<br>(D)                                                 | [Kg/h] [кг/ч] | 0,899           |
| Metano / Methane / Natural gas / Erdgas / Метан<br>(G20)<br>(C)                                  | [m3/h] [м3/ч] | 1,206           |
| Aria / Air / Luft / Aire / Воздух                                                                | [m3/h] [м3/ч] | 22,8            |
| Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas /<br>Газовое соединение         |               | UNI-ISO 7/1 R ½ |
| Piastra liscia / Plaque lisse / Smooth plate / Glatte Platte/ Plancha lisa /<br>гладкая конфорка |               | X               |

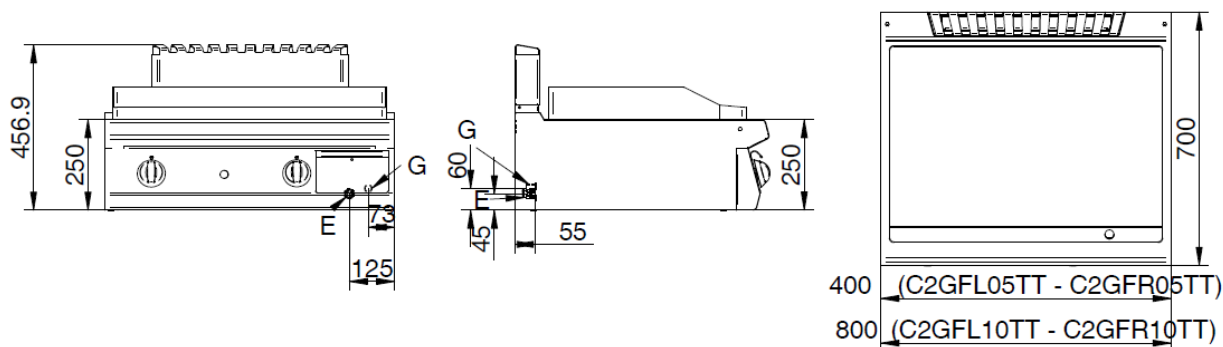

G= Gas\Gaz \ Газ