

K4GFGS0520E

GAS FRYER SINGLE TANK 20 LT. - SOLUTION LINE



PRODUCT DESCRIPTION

Stainless steel frame. Athermic thermoset plastic knobs with useful screen printed edges.

Oil heating achieved through **optimised combustion stainless steel burners** equipped with heat exchanger in the tank. Powerful and quick intervention of the heating elements to prevent the oil temperature from dropping when the food is poured into the tank.

One tank of 20 litres, equipped with a safety gas valve, which allows temperature regulation **between 120°C and 190°C**. Safety guaranteed by a thermocouple kept active by the pilot burner flame and by a safety thermostat with manual reset.

Stainless steel tank with rounded edges sloping towards the drain hole.

Oil drains from the tank through a tap.

Standard provided with one steel baskets coated with a layer of protective material K2605 and one stainless steel basin cover KCOPFGS.

Cabinet suitable for a stainless steel container to collect the oil.

AISI 304 stainless steel worktop with welded AISI 304 stainless steel tank.

Laser-cut work top finishing for "head-to-head" matching and binding fastening.

Tested with natural gas or LPG, according to the user's needs.

Height-adjustable stainless steel legs.

Accessories available **on demand**.



TECHNICAL SPECIFICATIONS

Width: 400 mm
Depth: 900 mm
Height: 850 mm
Weight: 63 kg
Volume: 0.56 m³
Gas power: 18.00 kW




K4GFGS0520E

FRIGGITRICE A GAS 20 LT. / FRITEUSE A GAZ 20 LT. / GAS FRYER 20 LT. / GASFRITTEUSE 20 LT. / FREIDORA A GAS 20 LT. / ГАЗОВАЯ ФРИТЮРНИЦА 20 Л.

DATI TECNICI / CARACTERISTIQUES TECHNIQUES / TECHNICAL SPECIFICATIONS / TECHNISCHE DATEN / CARACTERISTICAS TECNICAS / ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Dimensioni / Dimensions / Dimensions / Maße / Medidas / Размеры	[мм]	400x800x850
Gas / Gaz / Gas / Gas / Газ (B)	[Kw] - [кВт]	18
Tipo / Type / Type / Typ / Тип (A)		A1/B21
GPL/LPG / Сжиженный нефтяной газ (G30) (D)	[Kg/h] [кг/ч]	1,419
Metano / Methane / Natural gas / Erdgas / Метан (G20) (C)	[m3/h] [м3/ч]	1,905
Aria / Air / Luft / Aire / Воздух	[m3/h] [м3/ч]	36
Racc. Gas / Racc. Gaz / Gas fitting / Gasanschluss / Empalme gas / Газовое соединение		UNI-ISO 7/1 R ½
Capacità vasca/ Capacité cuve/ Tank capacity/ Beckeninhalte/ Capacidad cuba/ Ёмкость чаши	[l] [л]	20
Quantità di patate massima contenuta in un cesto grande - Quantité maximale de pommes de terre dans un grand panier - Maximum quantity of potatoes in a large basket - Maximale Menge an Kartoffeln in einem großen Korb - Cantidad máxima de patatas en una cesta grande - Максимальное количество картофеля в большой корзине	[kg] [кг]	3
Produzione massima - Production maximale - Maximum output - Maximale Leistung - Producción máxima - Максимальное производство	[kg/h] [кг/ч]	25

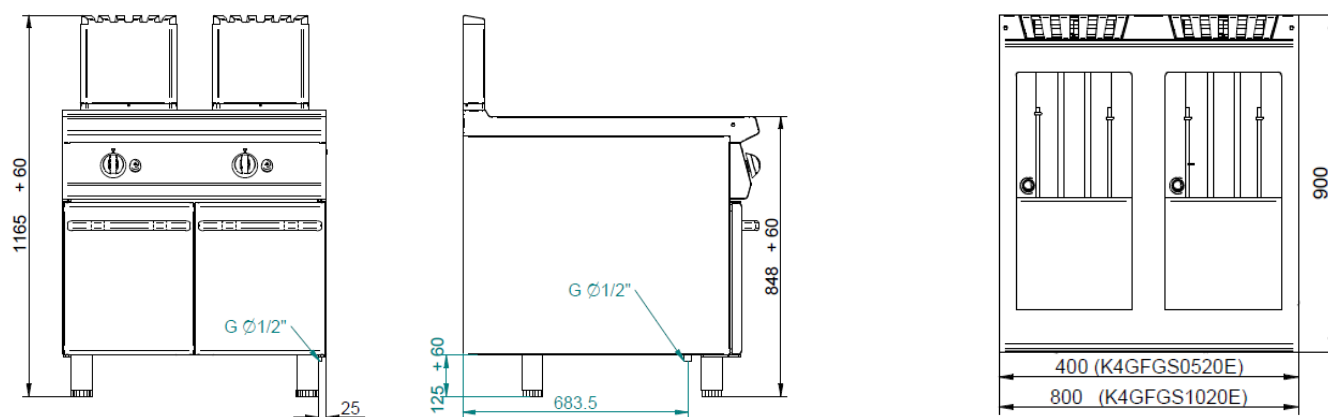

G = Gas / Gaz / Gas / Gas / Gas / газ

Standard

CESTO / PANIER / BASKET / KORB / CESTO / КОРЗИНА	1 x K26025	
--	---------------	--

Optional

BACINELLA RACCOGLI OLIO + FILTRO INOX/ BAC RECUPERATION HUILE AVEC FILTRE EN INOX / CONTAINER COLLECTION OIL + STAINLESS STEEL FILTER / ÖLSAMMELBEHÄLTER MIT SIEB AUS EDELSTAHL / RECIPIENTE RECOGIDA ACEITE CON SU FILTRO DE ACERO INOX / ЕМКОСТЬ ДЛЯ СБОРА МАСЛА + ФИЛЬТР НЕРЖАВЕЮЩАЯ СТАЛЬ	K4VOFG	
---	--------	--